



110 South 2<sup>nd</sup> Street  
 Jeannette, PA 15644  
 Phone: 724-527-4000 x20  
 William A. Whetzel

**For Office Use Only**

Received By: \_\_\_\_\_  
 Date: \_\_\_\_\_ Amount Paid: \_\_\_\_\_  
 Cash: \_\_\_\_\_ Check #: \_\_\_\_\_  
 Credit Card: \_\_\_\_\_ CVC: \_\_\_\_\_  
 Credit Card #: \_\_\_\_\_

City of Jeannette

**SIDEWALK PERMIT APPLICATION**

**1. APPLICANT INFORMATION:**

Name: First	Last	Street Address	City
Phone Number	Cell Number	Email Address	

**2. CONTRACTOR PERFORMING WORK INFORMATION:**

Name: Owner or Company	Street Address	City
Phone Number	Cell Number	Email Address

**3. LOCATION OF WORK:**

**PARCEL NO.: 14 -**

Street Address	City
----------------	------

**4. DESCRIPTION AND NATURE OF WORK (INCLUDE SIZE OF SIDEWALK ALL DIMENSIONS):**

---



---



---

5. **DATE TO BEGIN WORK:** \_\_\_\_\_

6. **DATE WORK TO BE COMPLETED:** \_\_\_\_\_


7. **WILL WORK INVOLVE CLOSING OF ANY PORTION OF A STREET OR ALLEY?** \_\_\_ YES \_\_\_ NO

**A. IF CLOSING OF ANY PORTION OF A STREET OR ALLEY IS ANTICIPATED:**


1. **WHAT DATES ARE CLOSING TO OCCUR?** \_\_\_\_\_

**SIGNATURE OF APPLICANT:** \_\_\_\_\_

CONCRETE SURFACE,  
BROOM FINISH, UNLESS OTHERWISE SPECIFIED  
OR TO MATCH EXISTING CONDITIONS

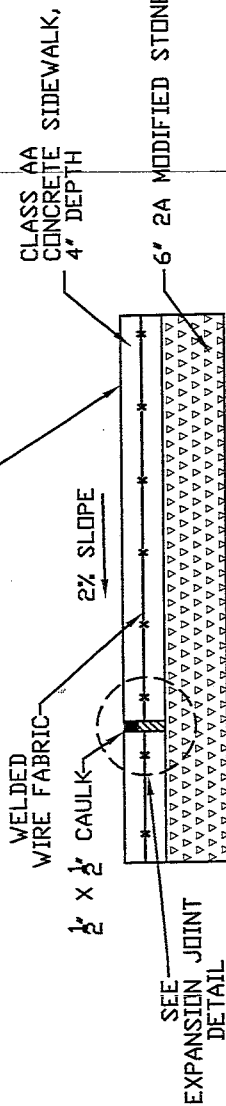


CONCRETE SIDEWALK SECTION  
NTS

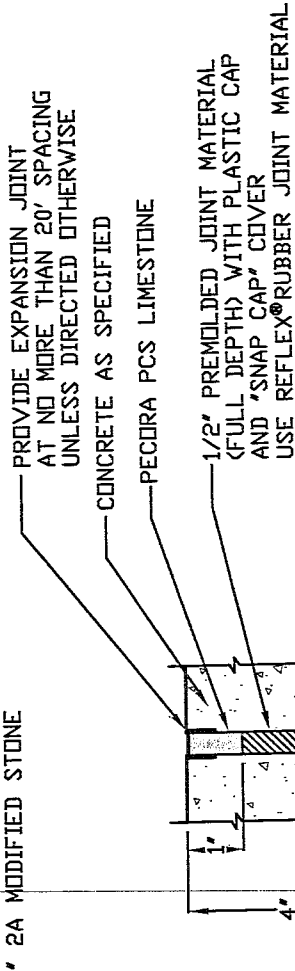

EXPANSION JOINT DETAIL  
NTS

PROVIDE SCORING  
AT 5' INTERVALS  
BETWEEN EXPANSION JOINTS  
UNLESS OTHERWISE  
SPECIFIED, AND/OR  
AS INDICATED ON  
LAYOUT PLANS

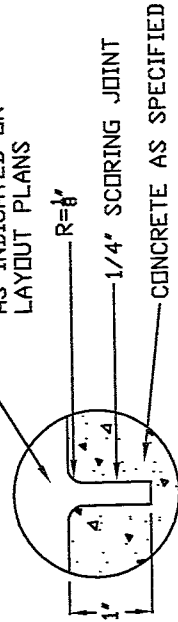

SCORING JOINT DETAIL  
NTS

GENERAL SIDEWALK NOTES:

1. WELDED WIRE FABRIC IS 6X6-W2.1 X W2.1
2. CONTRACTION JOINTS SHALL DIVIDE SIDEWALK INTO SQUARE PANELS.
3. CURE NEW CONCRETE SIDEWALK IN ACCORDANCE WITH PENN DOT SPECIFICATION PUB. 408, USE NOX-CRETE CURE & SEAL 1315A.
4. SPACE 1/2' EXPANSION JOINTS AT 20'-0" MAX. SPACING AND 3/8" ALONG BUILDINGS.
5. PLACE AND COMPACT 6"-2A MODIFIED STONE GRANULAR SUBBASE BENEATH SIDEWALK.
6. FURNISH AND INSTALL CLASS AA CONCRETE TO ACHIEVE 3750 PSI DESIGN STRENGTH AT 28 DAYS.
7. SLOPE SIDEWALK TOWARDS THE STREET.
8. SPECIFICATIONS, BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE, ACI 318. LATEST REVISION.
9. MINIMUM LAP SPlice FOR WELDED WIRE REINFORCEMENT WILL BE 12".
10. SEAL ALL CONTRACTION, EXPANSION, AND CONSTRUCTION JOINTS WITH PECORA PCS LIMESTONE COLORED CAULKING.